

VEHICLE COOLING UNIT
MODEL: VCU-36, VCU-72 & VCU-36-A
PARTS AND INSTRUCTION MANUAL

SPECS FOR VEHICLE COOLING UNITS:


- 1/16" Diameter Holes
- 83 Holes per 3 Foot Section
- 140 Degree Spray Pattern
- Connection: 1 1/2" IVH
- 100 PSI Max Pressure at VCU Connection




Scan for more
information



MODELS:

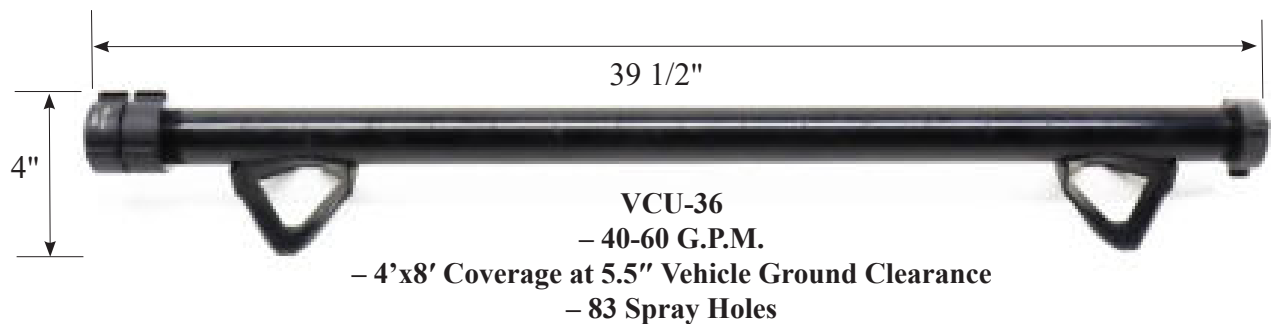


Model: VCU-36
Single unit Complete

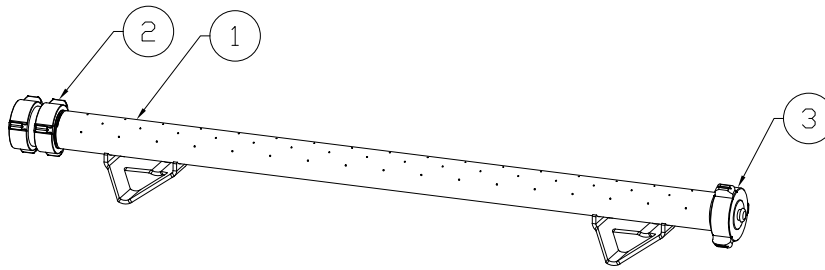

Item No.	Part Number	Description	Qty
1	2075-005-101	VEHICLE COOLING UNIT WELDMENT, 36 INCH	1
2	2075-005-107	ADAPTER, DOUBLE FEMALE SWIVEL, 1 1/2 NPT TO 1 1/2 NH	1
3	2075-005-109	ROCKER LUG END CAP, 1 1/2 NPT	1

Model: VCU-72
Double unit complete

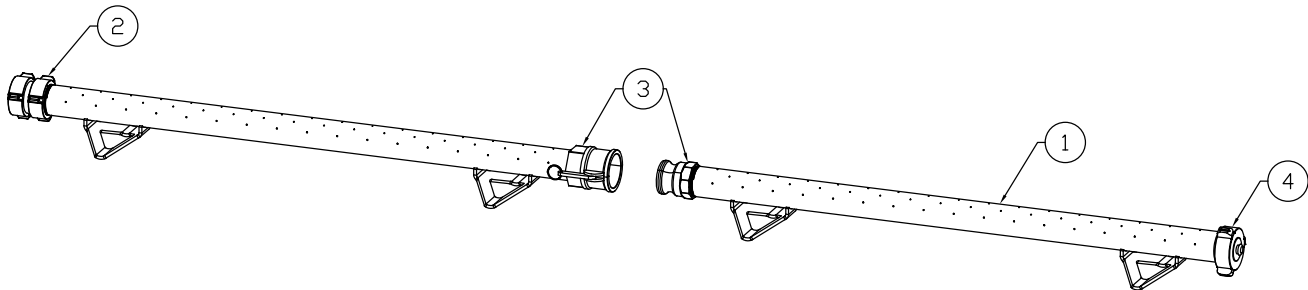

Item No.	Part Number	Description	Qty
1	2075-005-101	VEHICLE COOLING UNIT WELDMENT, 36 INCH	2
2	2075-005-107	ADAPTER, DOUBLE FEMALE SWIVEL, 1 1/2 NPT TO 1 1/2 NH	1
3	2075-005-111	QUICK CONNECT, 1 1/2 NPT	1
4	2075-005-109	ROCKER LUG END CAP, 1 1/2 NPT	1


Model: VCU-36-A

Single adapter Unit

(A total of five single units can be joined together,
four added to VCU-36 or three added to VCU-72)

To add VCU-36-A:

1. Remove the end cap from existing VCU.
2. Install the female side of the quick connect(2) with thread sealant to the end that you removed the end cap from.
3. Install the end cap to the open end of the VCU-36-A with thread sealant

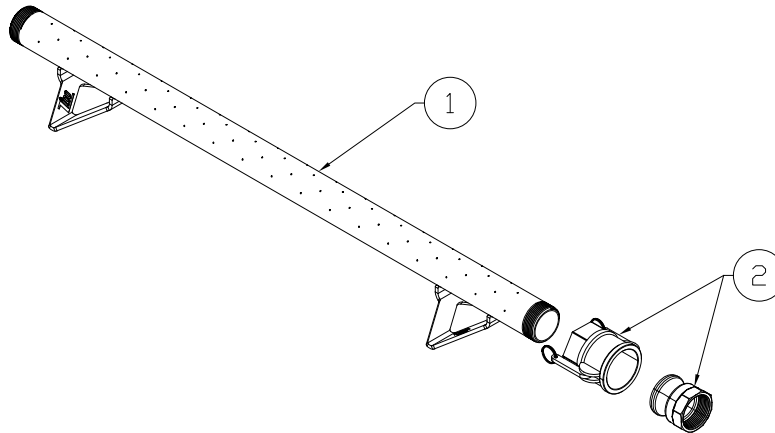

Item No.	PArt Number	Description	Qty
1	2075-005-101	VEHICLE COOLING UNIT WELDMENT, 36 INCH	1
2	2075-005-111	QUICK CONNECT, 1 1/2 NPT	1

• Operation

To Use:

1. Connect 1-1/2" hose to the swivel adapter (2) until tight.
2. Confirm End Cap (3) is tight, if your model has the quick connect, confirm it is fully engaged and locked.
3. Charge line with water only, not exceeding 100 PSI at VCU connection.
4. Slide the cooling unit under the vehicle.

To Stow:

1. Discharge water line and allow pressure to dissipate
2. Remove from under vehicle
3. Disconnect hose from swivel adapter (2)
4. Allow water to drain completely before stowing in compartment



Ziamatic Corp.

10 West College Avenue, P.O. Box 337, Yardley, PA 19067-0587 • (215) 493-3618 • FAX: (215) 493-1401

www.ziamatic.com

TOLL FREE: 800-711-3473

*ZICO is a registered trademark for fire, safety and marine products made by Ziamatic Corp.

Copyright Ziamatic Corp. 7-23